



CI 70

STRAPPING MACHINE


**CYKLOP**<sup>®</sup>  
GLOBAL PACKAGING SOLUTIONS

STRAPPING  
WRAPPING  
CODING  
TAPING

The automatic strapping machine CI 70 is suitable for strapping various packages or boxes. The machine is able to process PP strap of 9 or 12 mm and has a very simple control panel. The CI 70 is also mobile because of the swivel wheels. The strapping machine can make up to 29 strappings per minute, depending on the set tension, package size and arch size. This makes the CI 70 ideal as a starter in automatic strapping.

**Advantages**

- For PP strap of 9 or 12 mm, thickness from 0.55 mm
- Automatic belt insertion and ejection
- Easy operation
- Electronic tension control
- Built-in photo sensor for automatic strapping
- Mobile, equipped with foot pedal
- Various arch sizes available

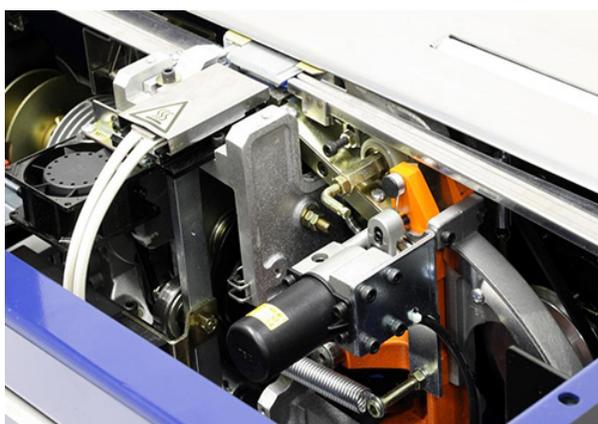

Technical specifications	
Min. package size	130 x 20 mm (LxW)
Strapping material	Polystrap 9 or 12 mm
Strap coil	Core diameter 200 mm Outer diameter 420 mm Width 190 mm
Strap tension	70 - 450 N
Sealing method	Hotseal
Noise	83 dB(A)
Warm up time	Approximately 1 min
Power	230 V, 50 Hz
Machine weight	Approximately 220 kg
Operating temperature	5 - 40 °C

Cyklop International  
 Industriestraße 133  
 D-50996 Köln  
 (Rodenkirchen)  
 Germany

+49 2236 6020  
[www.cyklop.com](http://www.cyklop.com)  
[info@cyklop.com](mailto:info@cyklop.com)

